



IndigoVision

NVR-AS 4000 RANGE



Compact Network Video Recorder

Small Size. Huge Performance.

With recording and simultaneous playback for up to 20 cameras, the IndigoVision Compact NVR-AS 4000 is ideal for smaller installations or for installations designed with distributed storage. With a Hard Disk Drive (HDD) that's optimised for 24/7 video recording, the Compact NVR-AS 4000 has recording support for multiple camera manufacturers.

Key Features

COMPRESSION

- H.264
- H.264
- JPEG 2000
- MJPEG
- MPEG-4

- GUARANTEED 25fps
- AAC
- G.711

OTHER

- DNA
- Firewall
- W
- Linux

PHYSICAL

- 1U Height
- Front Panel


STORAGE

- SATA


Product Codes

20 Channel	
Compact NVR-AS 1TB (Slimline)	980411
Compact NVR-AS 4TB	980424

Dimensions - 1TB (Slimline)

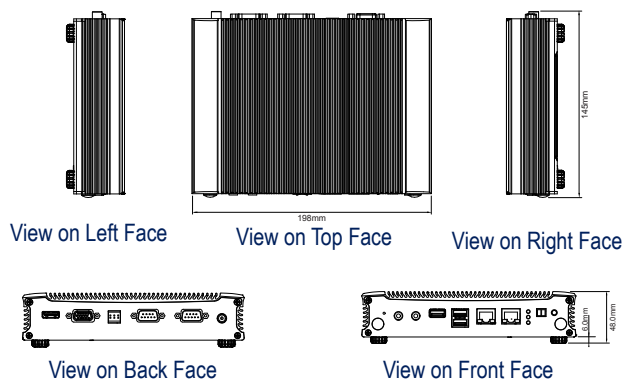

Dimensions - 4TB

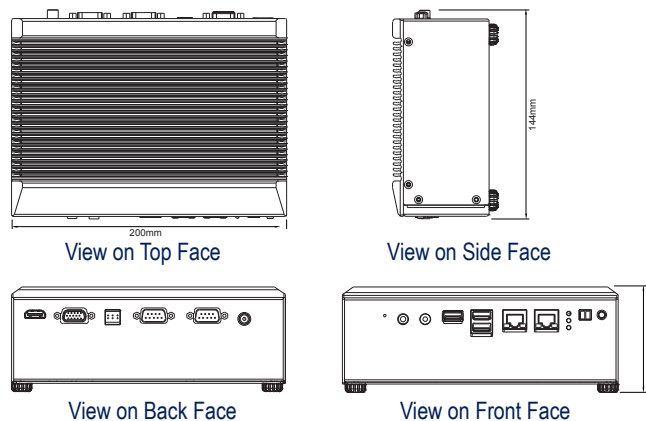

Specification

General Specification	1TB (Slimline)	4TB
Disk Space (GB)	1000	4000
Recording Hard Drive	1 x 2.5" Western Digital AV series optimised for 24x7 video storage. 3-year warranty	3.5" SATA Seagate Video HDD optimised for 24x7 video storage. 3-year warranty
Dimensions/Weight	145mm (d) x 198mm (w) x 48.0mm (h) and 1Kg	144mm (d) x 200mm (w) x 70.5mm (h) and 1.56Kg
Operating Temperature	0°C to 50°C	0°C to 50°C
Operating System	Embedded Linux	
Automatic Storage Management	Policy based management options for automatic deletion or protection of old footage	
Performance (Streams)	20 Recording plus simultaneous playback of 20 streams [^]	
Performance (Throughput)	40 Mbps in; 40 Mbps out; 80 Mbps total [^]	
Network Interface	Dual redundant 100/1000 BaseT RJ-45, TCP, UDP, ICMP, IGMP, HTTP, NTP, SSH, SFTP	
Network Security	SSH, SFTP, Embedded Linux Firewall	
Regulatory	EN55022 (2010) ITE – Class A, EN55024 (2010), 47CFR47: 2011 Part 15 subpart B –Class A, EN60068-2-29:1993 (15G), EN60068-2-64:1995 (Random) EN60068-2-96:1996 (Sine), EN60068-2-30, EN60068-2-1 at 0°C, EN60068-2-2 at +50°C (EN60068-2-2 @ 60°C for 1TB Extended Temperature)	
Housing	Aluminium steel enclosure (fanless)	
Electrical	Operating Voltage: Input 100-240V ~ 47-63Hz 1A; Power consumption: 19W operational, 24W (max). 12V DC power supply included	
Processor	Intel Celeron N2930 2GHz	
Supplied Accessories	External PSU	
Onboard Diagnostics	Disk, Network, License, Recording Failure Monitoring	
IndigoVision Software Requirements	Control Center v12.0 or later	
Mounting Options	Wall Mount, Rack Mount, VESA Mount, DIN Mount Accessory Kit	
Control Center Licensed Features		
The availability of the following NVR features varies based on the Control Center software product the NVR is connected to**		
Licensing	IndigoVision NVR appliances do not need a separate license. Video from any connected camera or encoder to the system can be recorded	
Video	Simultaneously record and playback full frame rate, full resolution video streams from any connected IndigoVision IP Camera or Encoder. Record and playback from other devices including ONVIF Profile S conformant cameras and encoders as well as devices integrated via Camera Gateway™	
Audio	Recording and playback of AAC and G.711 audio*	
Thumbnails	Indexed recordings for rapid display of time-based, alarm-based or motion-based thumbnails	
Alarms	Recording and logging of alarms and events	
Bookmarks	Recording and logging of bookmarks in association with recordings	
Integrated Data	Recording and logging of millions of data records from LPR, EPOS and other integrations	
Analytics	Recording and playback of motion analysis data from cameras*	
Redundancy and Failover	Full DNA support, sophisticated failover and mirroring strategies amongst multiple NVRs for increased resilience and redundancy	
Digital Watermarking	Digital signing at point of recording and at export	

* Features may vary based on capabilities of camera model. ** Please check the Control Center datasheets for more information. ^ With or without Digital Watermarking enabled.

Accessories

Accessories	Product Code
Wall Mount Bracket	110371
19" Rack Mount Bracket	110372
VESA Mount Bracket	110373
DIN Mount Accessory Kit	110374